

# Coat Hooks




## Safety Coat Hook

- Code 1150:** White hook with stainless steel base (single hook)
- Code 1150BK:** Black hook with stainless steel base (single hook)
- Code 1150-3:** White hook on stainless steel strip, (three hook strip)

**Specifications:** All stainless steel type 304 no. 4 finish. Hook is epoxy coated 18 ga. stainless steel, providing a smooth burr free edge. Spring loaded coat hook will only support weight of coat or jacket, heavier objects will slip off. Coat hook will not support loads in excess of 11 kilograms (25 lbs.), patent pending.

**Installation:** Secure to any panel with ss mounting screws provided. Screws are counter sunk ss with Phillips style finished head. Alternative colours available on special order (5-6 week lead times may apply). Note: Colour suffixes: B: blue, BK: black, R: red (example: Code 1150R denotes red hook on stainless base)

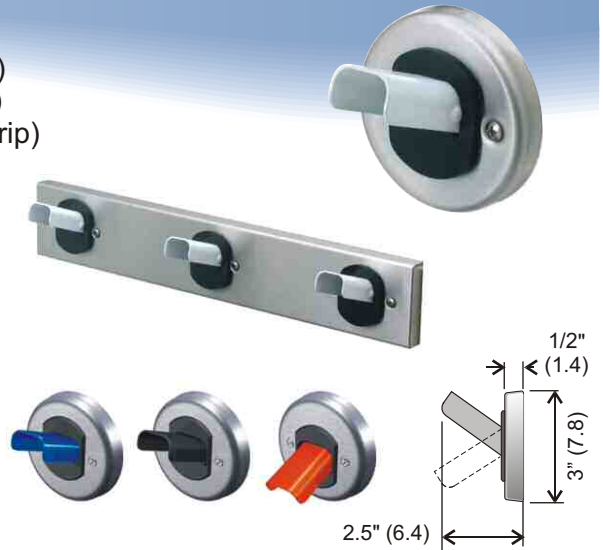

## Dryers

### Warm Air Hand/Hair Dryers

- Code 1187:** Automatic "no touch", white finish, 120 volts.
- Code 1187-1:** Automatic "no touch", white finish, 220 volts.
- Code 1190:** Automatic "no touch", brushed steel finish, 120 volts.
- Code 1190-1:** Automatic "no touch", brushed steel finish, 220 volts.
- Code 1192:** Automatic "no touch", High Speed, white finish, 120 v.
- Code 1193:** Automatic "no touch", High Speed, stainless steel, 120 v.
- Code 1195:** Ecofast, hands free dryer, white finish, 120 volts.
- Code 1196:** Ecofast, hands free dryer, stainless steel finish, 120v.

**Specifications:** Approximately 20 second drying time.  
**Features:** Sensitive distance of sensor: 4-12" (10-30 cm). Touch free sensor is activated when hands are placed within the set range under spout. There is a .6 sec delay for on and a 2 second delay for off. The power will be cut off automatically in cases of irregular use over 120 seconds, sensor will reset during normal use. Sensor is 100% moisture proof. Warranty: 5 years.

**Wind measure:** 161 cfm, (274 m<sup>3</sup>/h), **Wind velocity:** (16.5m/sec).

**Installation:** Insure when mounted that dryer is 12" (30cm) above any fixed or movable objects. For unrestricted access insure bottom of dryer does not exceed 48" (220 cm) from floor. Four threaded mounting anchors and hole location template provided.

## Auto Air



**Durable,  
Economical  
and  
Hands Free**



Code 1187



Code 1188



Code 1192



Code 1193



Code 1195



Code 1196

